

(12) DEMANDE INTERNATIONALE PUBLIÉE EN VERTU DU TRAITÉ DE COOPÉRATION
EN MATIÈRE DE BREVETS (PCT)(19) Organisation Mondiale de la Propriété
Intellectuelle
Bureau international(43) Date de la publication internationale
10 janvier 2002 (10.01.2002)

PCT

(10) Numéro de publication internationale
WO 02/03510 A1(51) Classification internationale des brevets⁷ : H01S 3/067André [FR/FR]; 19, avenue d'Arpajon, 91520 Egly (FR).
GASCA, Laurent [FR/FR]; 9, avenue Georges Pompidou,
F-91140 Villevenon sur Yvette (FR).

(21) Numéro de la demande internationale :

PCT/FR01/02062

(22) Date de dépôt international : 28 juin 2001 (28.06.2001)

(74) Mandataire : LAMOUREUX, Bernard; Compagnie Fi-
nancière Alcatel, DPI, 30, avenue Kléber, F-75116 Paris
(FR).

(25) Langue de dépôt : français

(26) Langue de publication : français

(81) États désignés (national) : JP, US.

(30) Données relatives à la priorité :
00/08796 6 juillet 2000 (06.07.2000) FR(84) États désignés (régional) : brevet européen (AT, BE, CH,
CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT,
SE, TR).(71) Déposant (pour tous les États désignés sauf US) : ALCA-
TEL [FR/FR]; 54, rue la Boétie, F-75009 Paris (FR).

Déclaration en vertu de la règle 4.17 :

(72) Inventeurs; et


— relative à la qualité d'inventeur (règle 4.17.iv)) pour US
seulement

(75) Inventeurs/Déposants (pour US seulement) : TARDY,

[Suite sur la page suivante]

(54) Title: CLADDING-PUMPED OPTICAL FIBRE AND METHOD FOR MAKING SAME

(54) Titre : FIBRE OPTIQUE A POMPAGE PAR LA GAINÉ ET PROCÉDE DE FABRICATION D'UNE TELLE FIBRE

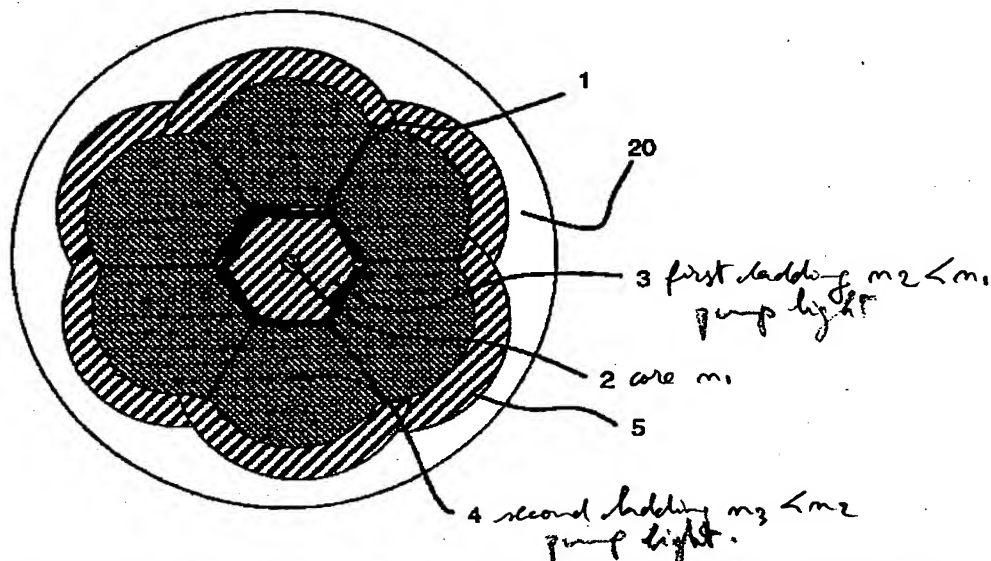

(57) Abstract: The invention concerns a cladding-pumped optical fibre comprising: a core with optical index n_1 , around the core, a first cladding with index n_2 less than n_1 , around the first cladding, a second cladding with index n_3 less than n_2 . The interface between the first and second claddings has, in cross-section, a substantially polygonal shape. The invention also concerns a method for making a cladding-pumped optical fibre, which consists in executing the following steps: positioning, around a central optical preform comprising a core with index n_1 enclosed with a first cladding with index n_2 less than n_1 , several bars with index n_3 less than n_2 , vacuum drawing of the optical preform and the bars, until fibre drawing and an optical fibre comprising a core and two claddings are obtained.

[Suite sur la page suivante]

AN OPTICAL FIBER PUMPED THROUGH THE CLADDING AND A METHOD OF FABRICATING IT

The present invention relates to an optical fiber pumped through the cladding and a method of fabricating it.

5 Optical fibers pumped through the cladding have a particular structure such that they can accept more pump optical power and thereby increase the amplification of the optical signal, which is achieved by absorbing energy.

10 The amplification energy is supplied by a high-power laser coupled into a cladding around the core of the optical fiber, the luminous energy supplied to the cladding in this way being absorbed by the core as soon as the light rays propagating in the cladding cross the interface between the core and the cladding.

Obviously the efficiency of energy pumping is essentially conditioned by the efficiency of the coupling between the core and the cladding.

15 One problem that arises with cylindrical core/cladding interfaces is that some light rays conveyed by the cladding follow a helical trajectory around the core without ever impinging on the interface.

The energy conveyed by these rays is therefore injected into the cladding in vain, because it is never used to amplify the signal transported by the core.

20 To attempt to solve this problem, it has already been proposed, in particular in US patent 5,966,491, to form longitudinal grooves in the outside surface of the cladding to break up the helical trajectories of the light rays and force them to impinge on the core/cladding interface.

25 Another solution, proposed in WO 99/30 391, consists in inserting rods into longitudinal passages formed in the cladding to produce radial protuberances at the surface of the cladding and thereby disturb the trajectory of the light rays in the cladding.

The present invention aims to propose an optical fiber with a new structure based on the same principle of disturbing light rays in the cladding.

30 The present invention provides an optical fiber pumped through the cladding, including:

- a core having an optical index n_1 ,
- around the core, a first cladding having an index n_2 lower than n_1 , and
- around the first cladding, a second cladding having an index n_3 lower than n_2 ,
- 35 - characterized in that the interface between the first cladding and the

second cladding has a substantially polygonal cross section.

Obviously, thanks to the polygonal shape of the cross section of the interface, any light ray conveyed by the cladding that might tend to trace out a helix around the core without ever impinging on the core/cladding interface is disturbed by the interface between the first cladding and the second cladding and cannot maintain its helical trajectory.

Consequently, a large number of light rays that would be lost in a circular section structure are recovered by the invention.

In one particular embodiment of the invention, the core consists of doped silica glass, the first cladding consists of undoped or very weakly doped silica glass, and the second cladding consists of silica glass doped negatively, for example with fluorine or boron.

In another embodiment the core consists of strongly doped silica glass, the first cladding consists of silica glass doped positively, for example with germanium, and the second cladding consists of undoped silica glass.

In either of the above two embodiments, the core has the maximum index n_1 , the first cladding has an index n_2 lower than n_1 , and the second cladding has an index n_3 lower than n_2 .

In one particular embodiment, the fiber includes a low-index polymer coating around its second cladding and the interface between the second cladding and said coating has a substantially polygonal or multilobed cross section.

In this case, a second pumping structure is formed around the first pumping structure consisting of the core and the first cladding.

This second pumping structure includes the first cladding and the second cladding. The interface between the second cladding and the coating has the same function as that previously described for the interface between the first cladding and the second cladding, namely light rays circulating in the second cladding are prevented from tracing out a helix inside the second cladding without ever impinging on the interface between the first cladding and the second cladding, thanks to the substantially polygonal or multilobed shape of the interface between the second cladding and the covering.

Thus it is possible to use power lasers emitting at larger diameters and the energy injected into the first cladding and into the second cladding by the laser is used to amplify the signal conveyed by the core.

The present invention also provides an economic method of fabricating an

optical fiber as described above, which has the advantage of not involving costly mechanical machining.

The method is characterized in that it consists in executing the following steps:

5 - placing around a central optical preform including a core having an index n_1 surrounded by a first cladding having an index n_2 lower than n_1 , a plurality of rods having an index n_3 lower than n_2 , and

 - drawing the optical preform and the rods to obtain an optical fiber including a core and two claddings.

10 In the method according to the invention, the effect of drawing is to compress the rods positioned around the central optical preform to produce the claimed polygonal shape. The polygonal shape results from a balancing of the centripetal forces and plastic deformation of the central optical preform and the rods.

 In one particular embodiment, optical preforms with claddings having an index n_3 are used as the bars placed around the central optical preform.

15 An advantage of this embodiment is that it can sometimes be simpler to obtain optical preforms than to obtain homogeneous rods consisting of doped silica glass, for example.

 In this case, the core of the preforms used as rods no longer has its usual core function.

20 In another embodiment of the invention, the central optical preform is one that, if it had been drawn under the usual conditions, would become an optical fiber pumped through the cladding consisting of a core, a first cladding and a second cladding, the whole having a circular section structure, so that a number of light rays circulating helically in the first cladding would not be used.

25 In this embodiment, the method is characterized in that the central optical preform is, after drawing, an optical fiber pumped through the cladding consisting of a core having an index n_1 , a first cylindrical cladding of circular section surrounding the core and having an index n_2 lower than n_1 , and a second cylindrical cladding of circular section surrounding the first cladding and having an index n_3 .

30 However, thanks to the presence in accordance with the invention of the rods having an index n_3 around the central optical preform, drawing said central optical preform and said rods modifies the section of the interface between the first cladding and the second cladding, that section losing its circular symmetry in favor of a polygonal shape because of the balancing of the centripetal forces exerted by the

rods.

If the rods are made of the same material as the second cladding of the central optical preform, the second cladding and said tubes fuse and this leads to the formation of a single second cladding.

5 In one particular embodiment, the central optical preform and the rods having an index n_3 are placed in a sleeve within which the atmosphere is controlled for drawing by establishing a vacuum or a partial pressure of neutral gases such as helium or reagents such as C_2F_6 .

10 The sleeve is advantageously made of silica whose index has been reduced by appropriate doping, for example with fluorine or boron.

This method, well known for drawing optical fibers, is applied without difficulty to the optical fibers according to the present invention.

15 In another embodiment of the invention, the drawing atmosphere is controlled without recourse to any sleeve. On the other hand, the interstices between the rods having an index n_3 are filled and the atmosphere in the volume delimited by the rods is controlled for drawing by establishing a vacuum or a partial pressure of neutral gases such as helium or reagents such as C_2F_6 .

In one particular embodiment, the second cladding is enveloped in a low-index polymer coating.

20 The presence of the polymer coating produces a third cladding having an index n_4 lower than n_3 and which channels the light rays in the second cladding to produce a second pumping structure between the third cladding and the second cladding.

25 To facilitate an understanding of the invention, a few non-limiting examples are described next with the aid of the accompanying drawings, in which:

- figure 1 is a cross section of an assembly intended to form a pumping structure according to the invention,

- figure 2 is a section analogous to figure 1 of the assembly after drawing in a vacuum,

30 - figure 3 is a cross section of an assembly intended to form another pumping structure according to the invention,

- figure 4 is a section analogous to figure 3 of the assembly after drawing in a vacuum,

35 - figure 5 is a cross section of an assembly intended to form a double pumping structure according to the invention, and

- figure 6 is a section analogous to figure 5 showing the assembly after drawing.

Figure 1 shows an optical preform 1 including a monomode core 2 doped with appropriate rare earths for pumping. This is well known to the person skilled in the art. The core has a high first refractive index n_1 .

A first cladding 3 surrounds the core 2. The cladding 3 consists of undoped silica glass having a refractive index n_2 lower than that n_1 of the core.

An assembly of six cylindrical rods 4 of glass with a low refractive index, i.e. doped negatively so that the refractive index n_3 is lower than the refractive index n_2 of the first cladding, is held in position and introduced into a sleeve 5 that can be made of the same material as the cylindrical rods 4.

The combination is introduced into a drawing furnace (not shown) with the interior of the sleeve 5 evacuated.

The flow of the rods and the preform is controlled by operating on the drawing tension and rate.

The six cylindrical rods 4 each exert a centripetal force on the central preform 1 and balancing these forces causes the central preform to be crushed at each of six points 6 of contact with the cylindrical rods 4.

Each cylindrical rod 4 is also crushed at its point of contact with the preform, so that a contact plane is formed between the preform 1 and each cylindrical rod 4.

As a result of this the interface between the preform and the set of six cylindrical rods assumes a substantially hexagonal configuration, as can be seen in figure 2.

This polygonal shape is maintained in the drawing operation that converts the compacted preform into a fiber with appropriate external dimensions.

The fiber is then enclosed in a polymer coating 20 which protects it.

In the example shown in figures 3 and 4, the cylindrical rods are replaced by composite preforms 7, such as Heraeus Fluosil composite preforms, which consist of a silica core 8 and a fluorosilicate cladding 9.

The combination can be introduced into a sleeve and then put into a drawing furnace, as previously described.

However, in the example shown in figures 3 and 4, no sleeve was used. The interstices between the generatrices 10 along which the peripheral composite preforms 7 are in contact in pairs are filled in so that said preforms delimit a closed space surrounding the central preform 1, within which closed space a vacuum can be

established, in the same manner as inside a sleeve.

5 Drawing in a vacuum in a furnace (not shown) produces the structure shown in figure 4, which shows that the fluorosilicate first cladding 9 of each cylindrical rod 7 provides a third cladding of index n_3 , lower than the index n_2 , for the central preform 1, which is therefore surrounded by a first cladding 3 having an index n_2 and a second cladding 9 having an index n_3 .

In accordance with the invention, the interface between the first cladding and the second cladding has a hexagonal section.

10 In the embodiment shown in figures 5 and 6, the central preform previously described including a core and a first cladding is replaced by a central preform 11 including a core 12, a first cladding 13 and a second cladding 14.

This kind of central preform 11 is traditionally used to obtain a circularly symmetrical pumping structure.

15 Eight cylindrical silica glass rods 15 are placed at the periphery of the central preform, and the combination is introduced into a silica glass sleeve 16.

When a vacuum has been established in the sleeve, the preform 11 and the cylindrical rods 15 are drawn in a drawing furnace (not shown).

20 The flow of the cylindrical rods 15, on the one hand, and of the second cladding 14 of the central preform, on the other hand, produces an octagonal section interface between the first cladding 13 and the second cladding 14, which second cladding is the result of fusion of the original second cladding 14 of the preform and the cylindrical rods 15.

25 In practice, the original second cladding 14 of the preform is the substrate tube on which the MCVD technique has been used to deposit the doped silica glass layers constituting the guide structures of the fiber.

Clearly, in this example, it is not necessarily indispensable to eliminate the substrate tube completely, for example by evaporation, to implement the invention, the flow of the silica glass being obtained even if a thickness of the substrate tube remains around the first cladding of the preform.

30 The examples that have just been described are obviously not limiting on the scope of the invention, and can be modified in any way within the scope of the appended claims.

35 In particular, although drawing in a vacuum has been described, it is clear that any form of drawing in a controlled atmosphere, for example in a helium atmosphere or a C_2F_6 atmosphere, could be used to implement the invention.

CLAIMS

1. An optical fiber pumped through the cladding, including:
 - a core (2, 12) having an optical index n_1 ,
 - around the core, a first cladding (3, 15) having an index n_2 lower than n_1 , and
 - around the first cladding, a second cladding (4, 9, 14) having an index n_3 lower than n_2 ,
 characterized in that the interface between the first cladding (3, 13) and the second cladding (4, 9, 14) has a substantially polygonal cross section.
2. An optical fiber according to claim 1, characterized in that the core (2, 12) consists of doped silica glass, the first cladding (3, 13) consists of undoped or very weakly doped silica glass, and the second cladding (4, 9, 14) consists of silica glass doped negatively, for example with fluorine or boron.
3. An optical fiber according to claim 1, characterized in that the core (2, 12) consists of strongly doped silica glass, the first cladding (3, 13) consists of silica glass doped positively, for example with germanium, and the second cladding (4, 9, 14) consists of undoped silica glass.
4. An optical fiber according to any of claims 1 to 3, characterized in that it includes a low-index polymer coating (20) around its second cladding and in that the interface between the second cladding and said coating has a substantially polygonal or multilobed cross section.
5. A method of fabricating an optical fiber pumped through the cladding, characterized in that it consists in executing the following steps:
 - placing around a central optical preform (1, 11) including a core (2, 12) having an index n_1 surrounded by a first cladding (3, 13) having an index n_2 lower than n_1 , a plurality of rods (4, 9, 15) having an index n_3 lower than n_2 , and
 - drawing the optical preform and the rods to obtain an optical fiber including a core and two claddings.
6. A method according to claim 5, characterized in that optical preforms (7) with claddings having an index n_3 are used as the bars placed around the central optical preform.
7. A method according to either claim 5 or claim 6, characterized in that the central optical preform (11) is, after drawing, an optical fiber pumped through the cladding consisting of a core having an index n_1 , a first cylindrical cladding of circular section surrounding the core and having an index n_2 lower than n_1 , and

a second cylindrical cladding of circular section surrounding the first cladding and having an index n_3 .

- 5 **8.** A method according to any of claims 5 to 7, characterized in that the central optical preform and the rods having an index n_3 are placed in a sleeve (5, 16) within which the atmosphere is controlled for drawing by establishing a vacuum or a partial pressure of neutral gases such as helium or reagents such as C_2F_6 .
9. A method according to claim 8, characterized in that the sleeve is made of silica whose index has been reduced by appropriate doping, for example with fluorine or boron.
- 10 **10.** A method according to any of claims 5 to 7, characterized in that the interstices between the rods (15) having an index n_3 are filled and the atmosphere in the volume delimited by the rods is controlled for drawing by establishing a vacuum or a partial pressure of neutral gases such as helium or reagents such as C_2F_6 .
- 15 **11.** A method according to any of claims 5 to 10, characterized in that the second cladding is enveloped in a low-index polymer coating (20).

ABSTRACT

An optical fiber pumped through the cladding and a method of fabricating it

The invention concerns an optical fiber pumped through the cladding, including:

- a core having an optical index n_1 ,
- around the core, a first cladding having an index n_2 lower than n_1 , and
- around the first cladding, a second cladding having an index n_3 lower than n_2 ,
characterized in that the interface between the first cladding and the second cladding has a substantially polygonal cross section.

The invention also concerns a method of fabricating an optical fiber pumped through the cladding, characterized in that it consists in executing the following steps:

- placing around a central optical preform including a core having an index n_1 surrounded by a first cladding having an index n_2 lower than n_1 , a plurality of rods having an index n_3 lower than n_2 , and
- drawing the optical preform and the rods in a vacuum to obtain an optical fiber including a core and two claddings.

Figure to be published : Fig. 1

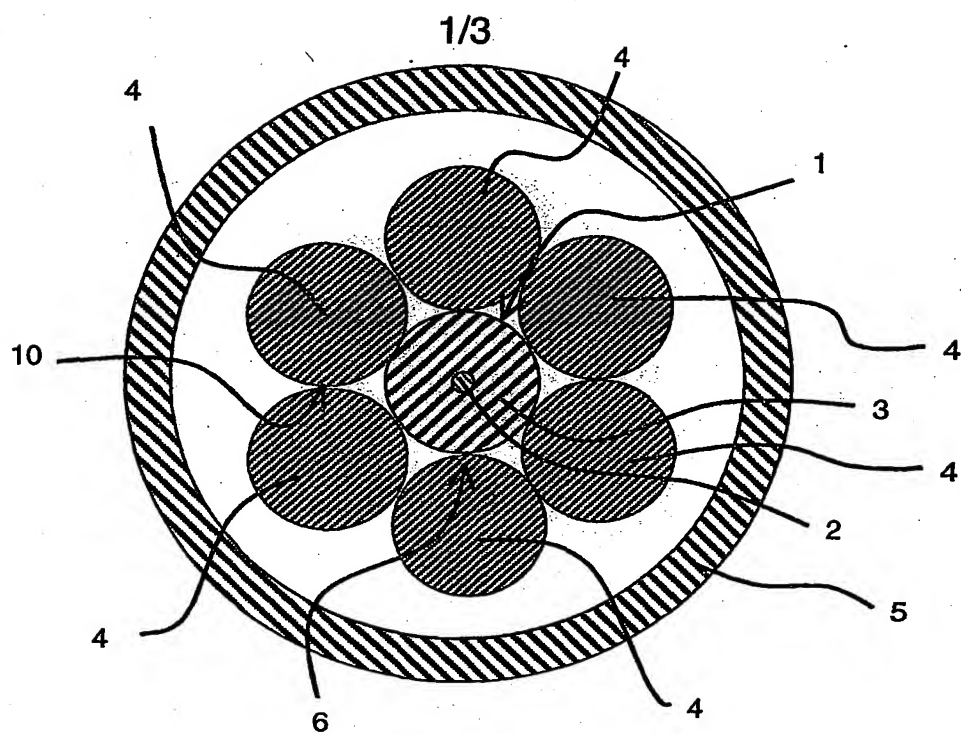


Fig.1

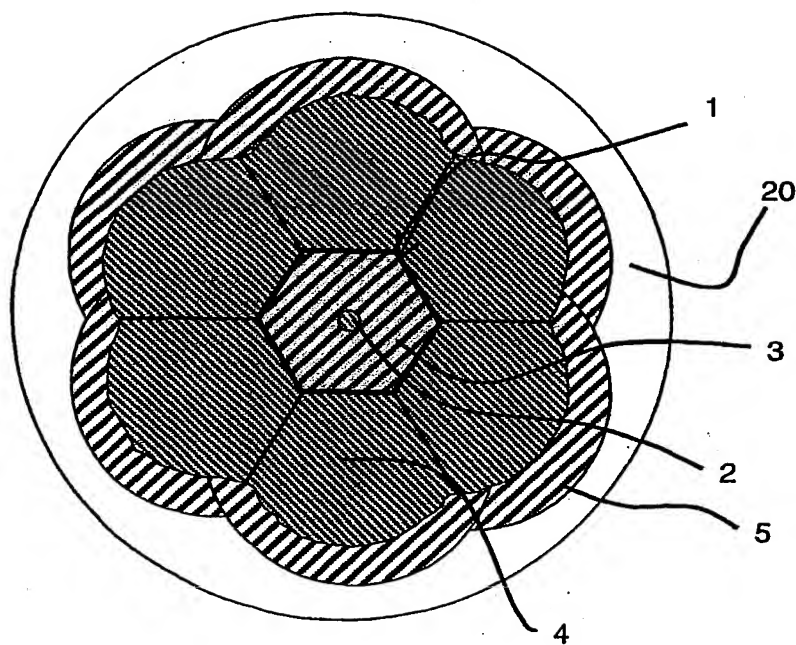


Fig.2

2/3

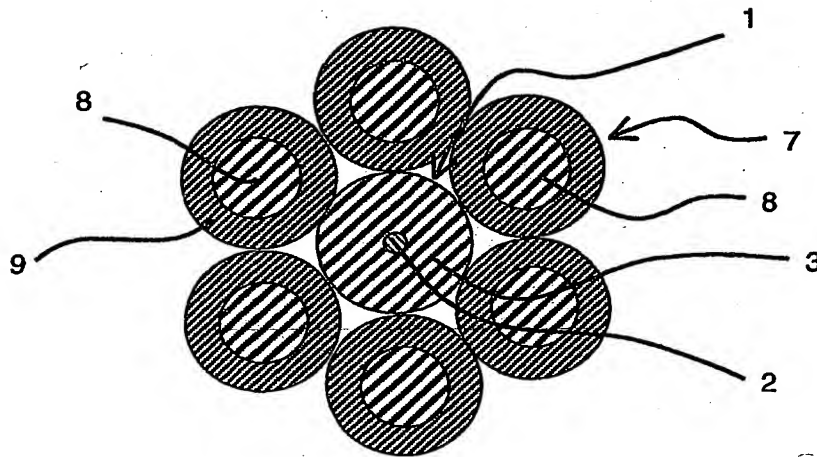


Fig.3

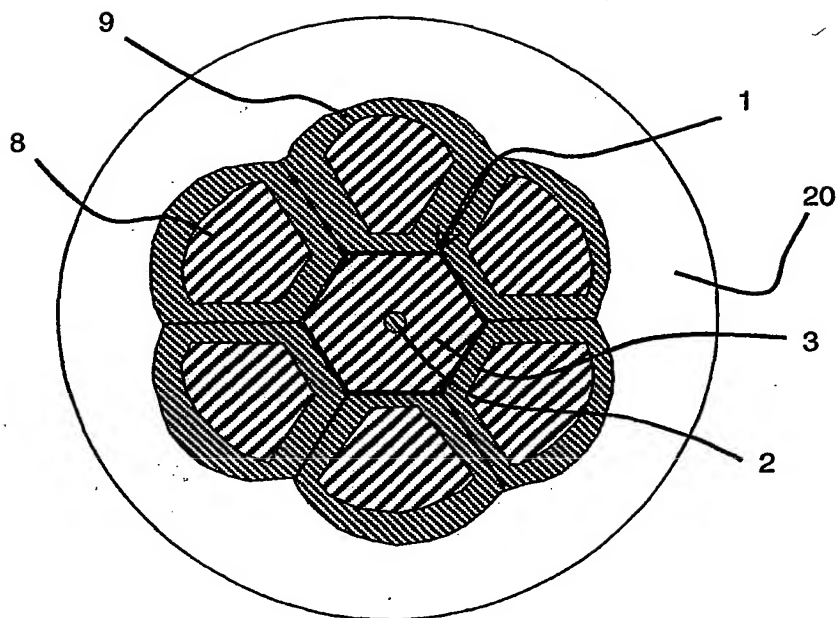


Fig.4

3/3

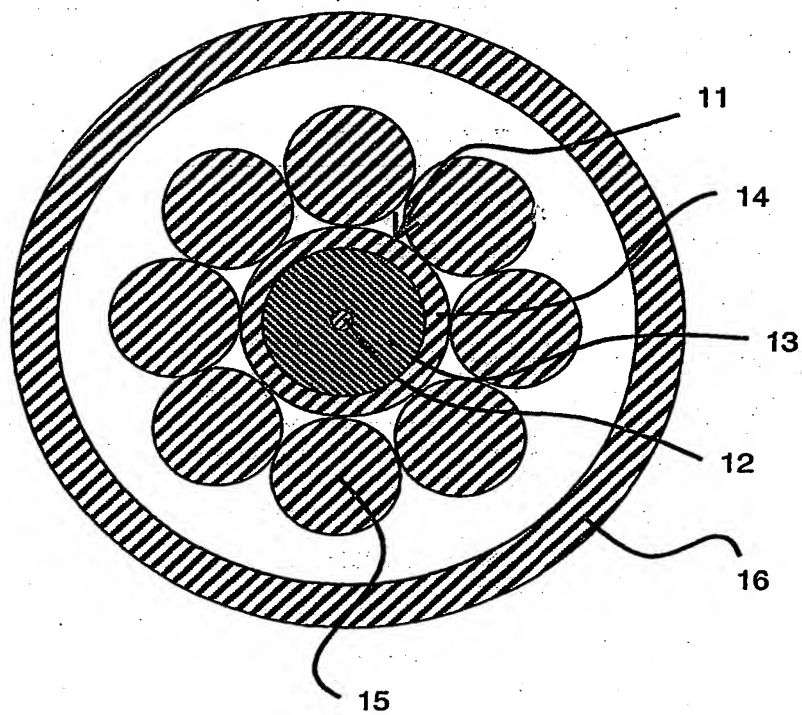


Fig.5

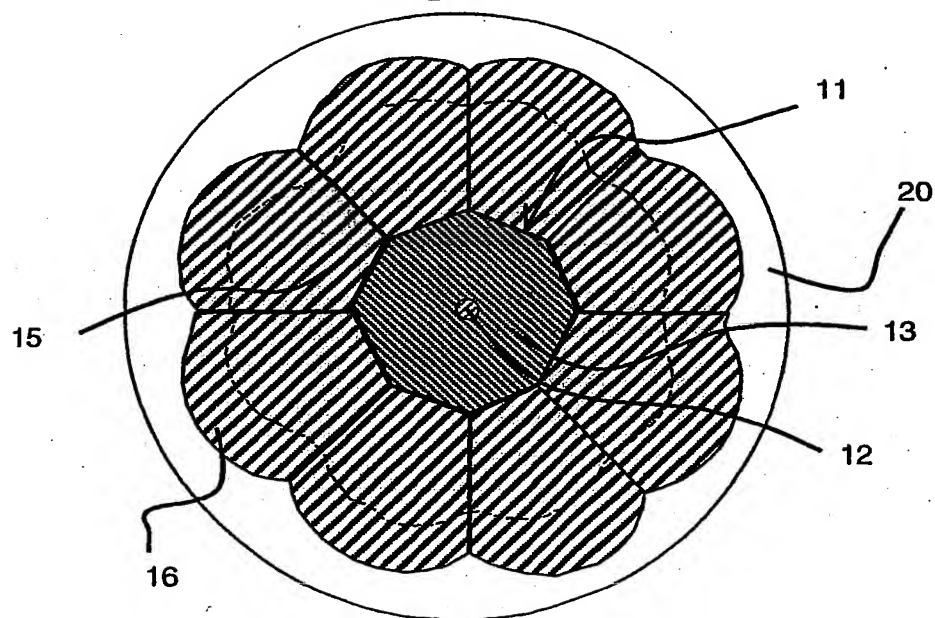


Fig.6

INTERNATIONAL SEARCH REPORT

International Application No
PCT/FR 01/02062

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01S3/067

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 949 941 A (DIGIOVANNI DAVID JOHN) 7 September 1999 (1999-09-07) column 4, line 16 - line 55; figures 1A,2	1-4
X	US 5 533 163 A (MUENDEL MARTIN H) 2 July 1996 (1996-07-02) column 8, line 10 - line 37; figures 6,10,11	1
A	column 14, line 5 - line 15 column 13, line 57 - line 60 --	5
	--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

I document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

2 November 2001

Date of mailing of the international search report

08/11/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, TX. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hervé, D

INTERNATIONAL SEARCH REPORT

International Application No

PCT/FR 01/02062

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	MUENDEL M H: "OPTIMAL INNER CLADDING SHAPES FOR DOUBLECLAD FIBER LASERS" CLEO '96. CONFERENCE ON LASERS AND ELECTRO-OPTICS. ANAHEIM, JUNE 2 - 7, 1996, CONFERENCE ON LASERS AND ELECTRO-OPTICS. (CLEO), NEW YORK, IEEE, US, 1996, page 209 XP000861756 ISBN: 0-7803-3183-4 the whole document	1
A	US 5 873 923 A (DIGIOVANNI DAVID JOHN) 23 February 1999 (1999-02-23) column 5, line 1 -column 6, line 23; figures 1-3	1-4
A	EP 0 695 003 A (HITACHI CABLE ;SHINETSU CHEMICAL CO (JP)) 31 January 1996 (1996-01-31) column 9, line 18 -column 11, line 2; figures 3,13	5
A	US 5 712 941 A (ABE JUN ET AL) 27 January 1998 (1998-01-27) column 4, line 14 - line 34; figure 3	5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/FR 01/02062

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5949941	A	07-09-1999	EP 0918382 A2 JP 11223734 A	26-05-1999 17-08-1999
US 5533163	A	02-07-1996	CA 2196188 A1 DE 69503249 D1 DE 69503249 T2 EP 0771481 A1 JP 10503885 T KR 241581 B1 WO 9604700 A1	15-02-1996 06-08-1998 29-10-1998 07-05-1997 07-04-1998 01-02-2000 15-02-1996
US 5873923	A	23-02-1999	DE 69604042 D1 DE 69604042 T2 EP 0776074 A2 JP 9194225 A US 5966491 A	07-10-1999 13-04-2000 28-05-1997 29-07-1997 12-10-1999
EP 0695003	A	31-01-1996	JP 2816097 B2 JP 8043644 A DE 69500687 D1 DE 69500687 T2 EP 0695003 A1 US 5570448 A	27-10-1998 16-02-1996 16-10-1997 09-04-1998 31-01-1996 29-10-1996
US 5712941	A	27-01-1998	JP 9159846 A CA 2178287 A1 GB 2308203 A , B	20-06-1997 12-06-1997 18-06-1997